METHOD FOR TREATING NITRIDE SEMICONDUCTOR AND NITRIDE SEMICONDUCTOR AS WELL AS NITRIDE SEMICONDUCTOR ELEMENT

Publication number: JP2003031552
Publication date: 2003-01-31

Inventor:

2003-01-31 TSUDA YUZO

Applicant:

SHARP KK

Classification:

- international:

H01L21/302; H01L21/306; H01L21/338; H01L29/778; H01L29/812; H01L33/00; H01S5/323; H01S5/343; H01L21/02; H01L29/66; H01L33/00; H01S5/00; (IPC1-7): H01L21/306; H01L21/338; H01L29/778; H01L29/812;

H01L33/00; H01S5/323


- european:

Application number: JP20010219123 20010719 Priority number(s): JP20010219123 20010719

Report a data error here

Abstract of JP2003031552

PROBLEM TO BE SOLVED: To improve surface morphology of a nitride semiconductor or its polishing damage. SOLUTION: A method for treating the nitride semiconductor comprises a step of heating the nitride semiconductor, and a step of introducing chlorine gas, an atmospheric gas and ammonia gas.

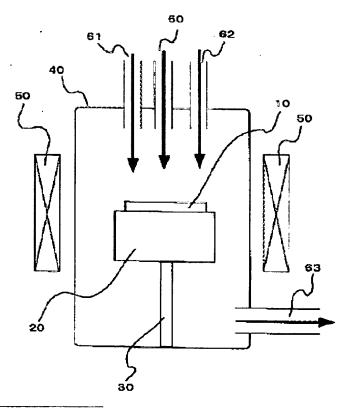

Data supplied from the esp@cenet database - Worldwide